


PVC INSULATED, MULTI-CORE FLEXIBLE CABLES

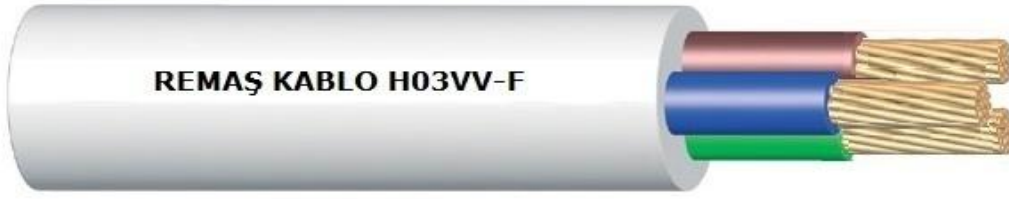

CODE	Standards
H03VV-F CU/PVC/PVC CU: IEC 60228 CLASS 5 F: Flexible conductor	TS EN 50525-2-11, VDE 0281-5-IEC60227-5

Technical Data	
Max. operating temperature	: 70 °C
Short circuit temperature	: 160 °C (max. 5 sn.)
Rated voltage	: 300/300V

Application	Construction
Used on household appliances in covered, dry, steamed and humid places where low mechanical stress exists.	<ol style="list-style-type: none"> 1. Flexible wires with fine stranded copper conductors 2. PVC insulation. 3. PVC sheath

Type	Nominal cross-section mm ²	Overall Diameter (approx.) mm	Net Weight (approx.) kg/km	DC Conductor Resistance at 20 °C ohm / km	Current Carrying Capacity
					In Air at 30 °C A
H03VV-F	2 x 0,50	5,1	37,34	39	3
	2 x 0,75	5,4	43,87	26	6
	3 x 0,50	5,4	40,62	39	3
	3 x 0,75	6,0	54,46	26	6
	4 x 0,50	6,0	51,57	39	3
	4 x 0,75	6,4	65,93	26	6